

MS SERIES REMOTE ACCESSORIES

PRODUCT DESCRIPTION

The MS Series remote accessories are designed to be used with Duct Smoke Detectors to provide audible and visual indication as well as remote test/reset functions. These devices are constructed of attractive, yet durable brushed stainless steel and mount on a standard single or double gang electrical backbox.



MS-RA



MS-RA/P



MS-RA/R



MS-RA/P/R



MS-RD



MS-RH/P/A



MS-RH/KA/P/R



MS-RH/KA/P/A/T



MS-RH




MEA APPROVED




CSFM LISTED


EXAMPLE WIRING

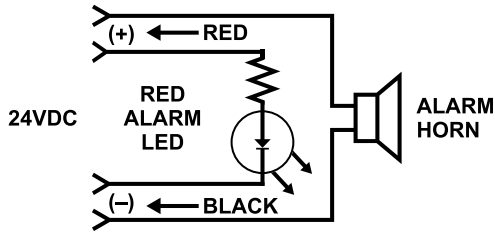


ALARM



PILOT



FAULT/TROUBLE

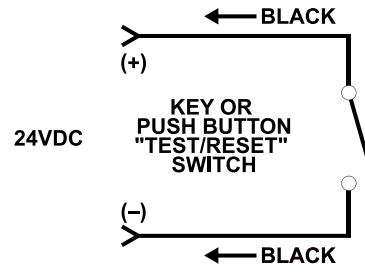

TEST/RESET

> FOR APPROPRIATE DUCT DETECTOR TERMINALS, PLEASE REFER TO DETECTOR INSTALLATION INSTRUCTIONS.

PRODUCT SPECIFICATIONS

	PILOT LED (GREEN)	ALARM LED (RED)	FAULT/TROUBLE LED (YELLOW)	PUSH BUTTON TEST/RESET	KEY OPERATED TEST/RESET	HORN	SINGLE GANG	DOUBLE GANG
MS-RA		●					●	
MS-RA/P	●	●					●	
MS-RA/R		●		●			●	
MS-RA/P/R	●	●		●			●	
MS-RD		●					●	
MS-RH/P/A	●	●				●	●	
MS-RH/KA/P/R	●	●			●	●		●
MS-RH/KA/P/A/T	●	●	●		●	●		●
MS-RH						●	●	

POWER REQUIREMENTS:

Alarm LED 15mA @ 24VDC
 Pilot LED 15mA @ 24VDC
 Alarm Horn 20mA @ 24VDC

SOUND PRESSURE:

Alarm Horn 78 db @ 10 ft

DIMENSIONS:

Single Gang 4 1/2"(114.3mm)H x 2 3/4"(69.85mm)W
 Double Gang 4 1/2"(114.3mm)H x 4 1/2"(114.3mm)W

WIRING:

LEDs/Horn 6" 24 AWG pigtails
 Switches 6" 22 AWG pigtails

APPROVALS:

UL Listed for use with duct smoke detectors including all RW-Series, SM-Series
 UL URRQ. S7425
 CSFM 7300-1004:107
 MEA 73-92-E VOL25