

MSR-AV TERMINAL SERIES

SINGLE-GANG AUDIO-VISUAL NOTIFICATION

PRODUCT DESCRIPTION

The MSR-AV Series provides audible and visible private mode alarm indications in a low-profile, single-gang Decora style configuration. Choice of plate colors include red, white and stainless steel.


Boasting code compliance with emergency signaling applications, the MSR-AV is Listed to UL 464 and UL 1638, and offers the industry's first LED strobe.

The sound output level is jumper-selectable at either 53/54 dB (low) or 68/69 dB (high). The sound output format is also jumper selectable for steady or temporal (code 3). The units are shipped with the jumpers installed, pre-set to high, temporal.

For use with UL Listed 24VDC polarized power circuits.



MSR-AV

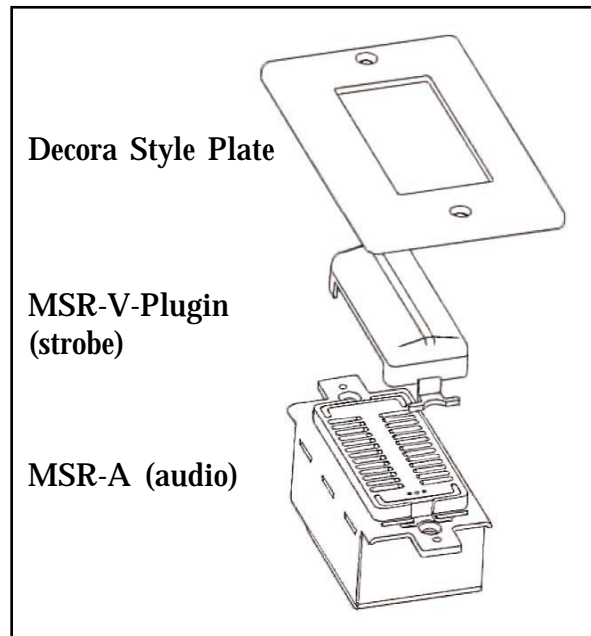

PRODUCT SPECIFICATIONS

X* = Replace X* with W for White Cover Plate; R for Red Cover Plate



MSR-AV/T

MSR-50AV/T/X*

Single gang audio-visual strobe sounder assembly with choice of color plate

MECHANICAL SPECIFICATIONS:

| | |
|---------------------------------|---|
| | MSR-AV/T |
| Voltage | 24VDC |
| Standby Current | 0.0 mA |
| Alarm Current | 70.0 mA |
| UL Alarm dB @ 10ft (high) | 68 dB |
| UL Alarm dB @ 10ft (low) | 53 dB |
| Reverberant Rm dB @ 10ft (high) | 87 dB |
| Reverberant Rm dB @ 10ft (low) | 83 dB |
| Alarm CD @ 10ft on axis | 2.0 |
| DIMENSIONS: | Single Gang Plate: 4½" (114.3mm)H x 2¾" (69.85mm)W |
| WIRING: | 14-28AWG, Solid or Stranded |
| APPROVALS: | UL S7425 (UL268-URRQ) / CSFM 7300-1004:119 Listed as APC MSR-50S/T (strobe); MSR-50A/T (sounder); MSR-50SA/T (combination strobe/sounder) |

ORDERING INFORMATION

| | |
|-------------|---|
| | Alarm displays, 24 VDC, for single gang electrical box mounting |
| | Sounder/LED strobe combo, clear lens*, w/ single gang plate |
| MSR-AV/TW/C | w/ White colored plate |
| MSR-AV/TR/C | w/ Red colored plate |

| | |
|-----------|---------------------|
| WARRANTY: | Limited three years |
|-----------|---------------------|